




DC Power Supply

GP-1305/GP-1503
GP-1505/GP-1310

사용자 설명서

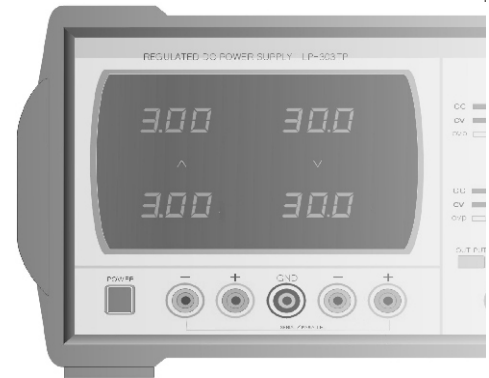

 이지디지털주식회사

()

()

[]

[]



GROUND



:

가

가

[]

:

:

1.

: 5 ~ +40
: 50% ~ 80%
: 0 ~ +70
: 85%

2.



가 가


[]

1
1
1
1

: **222-28**
Tel : 032-681-8380 Fax : 032-681-8404
: 032-681-8388 SVC : 032-677-9974

: **708-33** 5
Tel : 02-587-9977 Fax : 02-587-7384

: **681-2** A 221
Tel : 051-819-4203 Fax : 051-819-0057



1.	1
2.	3
2-1.	3
2-2.	5
2-3.	6
3.	7

4.	9
4-1.	9
4-2.	10
4-3.	11
5.	13
5-1.	13
5-2.	13
6.	13

1.

GP - Single

가

(O.V.P)

O.V.P

LED ()가

1

DC OUTPUT ON/OFF

DC OUTPUT ON/OFF 가 ON

(C.C)

(C.V)



230V

4

2


2.

2-1.

F1 (F1)

(F1)

 Power Cord
OFF

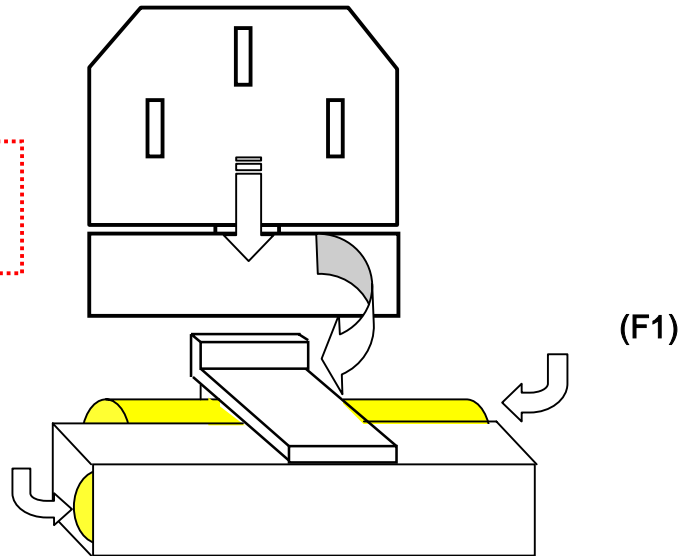

3

			(250V)			
			1305	1310	1503	1505
AC 90~132	115	F1	T2.5L	T7.0L	T2.5L	T5.0L
AC198~250	230	F1	T1.6L	T4.0L	T1.6L	T2.0L



!

4

2-2.



가

1.

2.

가
()
20 ~30

3.

4.

가

5.

가

6.

7.

5

8.

9.

10.

11.

12.

가

13.

가

.(

P13)

2-3.

1.

가

2.

가

3.

6

3.

		GP-1305	GP-1503	GP-1505
		0 ~ 30V/ 0 ~ 5A	0 ~ 50V/ 0 ~ 3A	0 ~ 50V/ 0 ~ 5A
		0.01% + 2mV		
		0.01% + 3mV		
	/	1mVrms		
		0.1% + 3mA		
		0.2% + 3mA		
	/	5mArms		
	DC Output SW on	±(1% of Reading + 1-Digit)		
	DC Output SW off	±(3-Digit of Reading)		
(O.V.P)		110%		
On/Off		Output	가	On
Limit		Output	Off	가
	~	20M	(DC500V)	
	~	50M	(DC500V)	
		5°C ~ 40°C		
		AC115V/ 230V 60Hz (50HZ)		
(W x H x D)		235mm x 136mm x 370mm		
(Approx.)		7.8Kg	7.8Kg	10Kg


7

		GP-1310 /1510		
		0 ~30V/ 0 ~ 10A	0 ~ 50V/ 0 ~ 10A	
		0.01% + 2mV		
		0.01% + 3mV		
	/	1mVrms		
		0.1% + 5mA		
		0.2% + 5mA		
	/	8mArms		
	DC Output SW on	±(1% of Reading + 1-Digit)		
	DC Output SW off	±(3-Digit of Reading)		
(O.V.P)		110%		
On/Off		Output	가	On
Limit		Output	Off	가
	~	20M	(DC500V)	
	~	50M	(DC500V)	
		5°C ~ 40°C		
		AC115V/230V 60Hz (50HZ)		
(W x H x D)		235mm x 136mm x 370mm		
(Approx.)		12Kg / 13.5Kg		


8

4.


4-1.

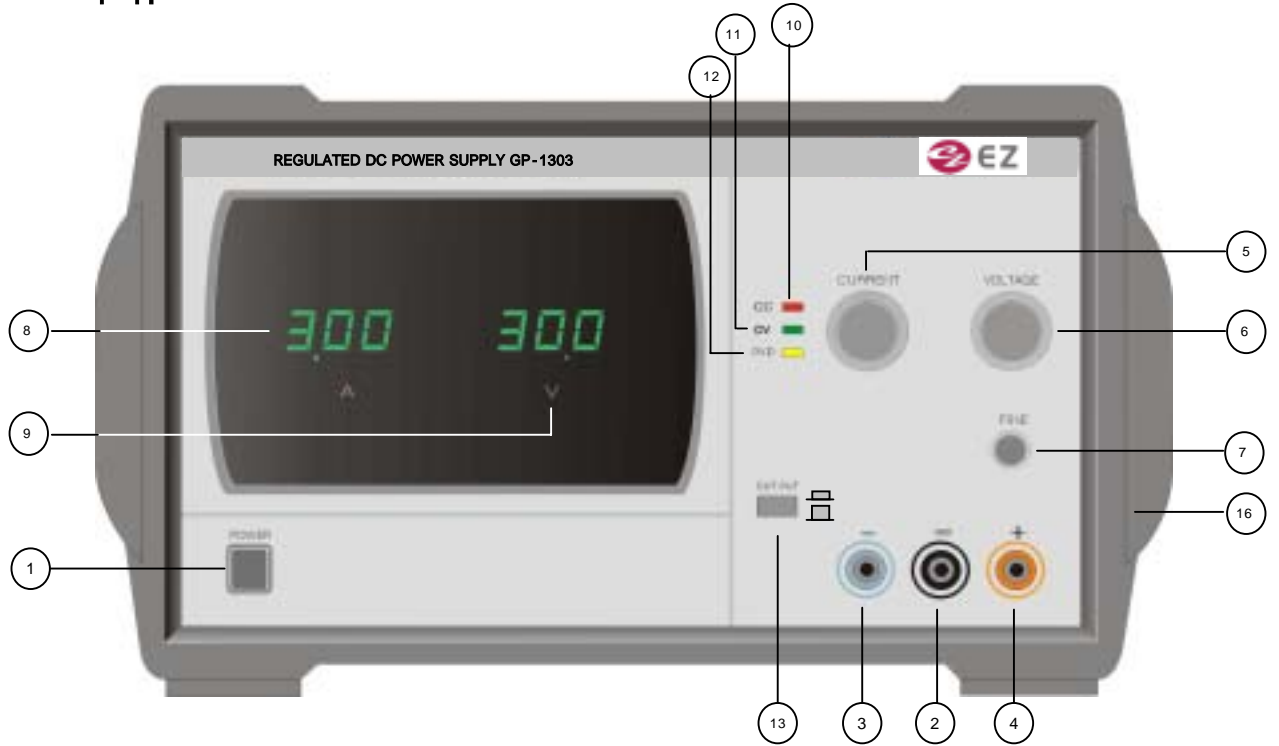

4-2.

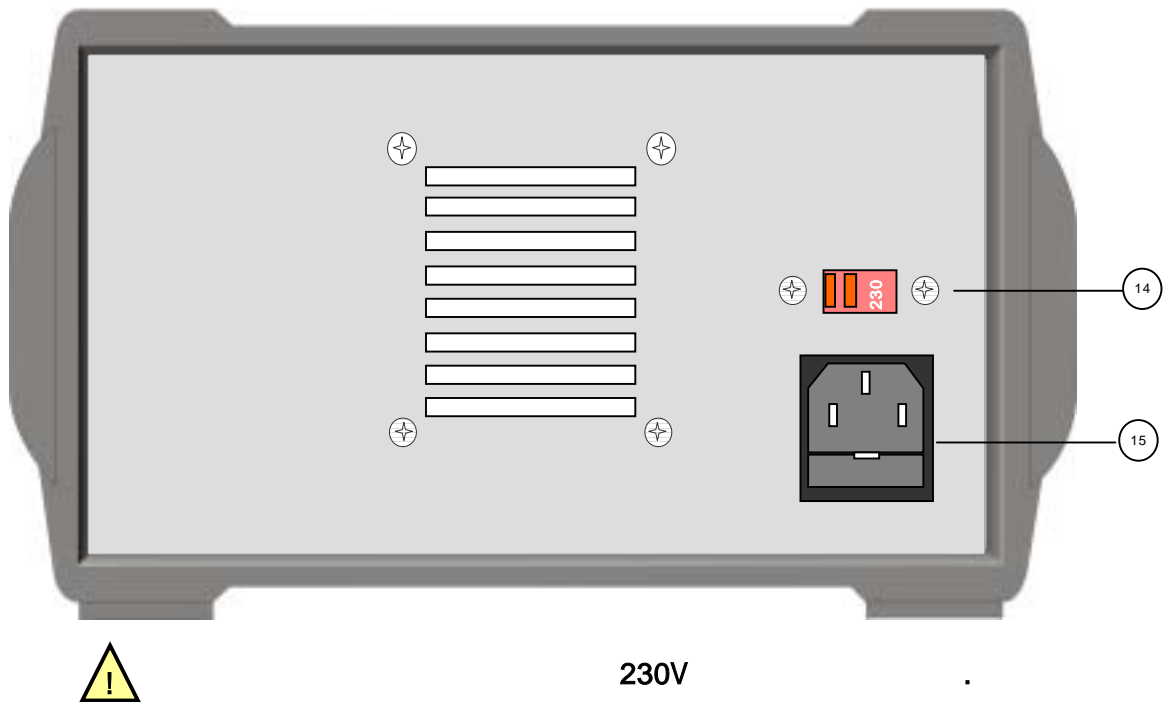

4-3. PANEL

- 1. :
- 2. GND  : GROUND
- 3. - : (-)
- 4. + : (+)
- 5. :
- 6. (Coarse) : 가
- 7. (Fine) : 가
- 8. : (3-Digit)
- 9. : (3-Digit)
- 10. C.C (Red) : 가 LED

11

-
-
- 11. C.V (Green) : LED
 - 12. O.V.P (Yellow) : LED
(.)
 - 13. DC Output On/Off :
ON (■):
OFF (■):
 - 14. : (115V/230V)
 - 15. :
 - 16. :
(. !)

12

5.

5-1

(, AC , ,)




가 115V,230V

5-2

- 1) DC OUTPUT OFF
- 2)
- 3)
- 4) , 가 .
- 5) DC OUTPUT ON OFF .(.)
가
- 6) 가 C.C 가 .

()

1)

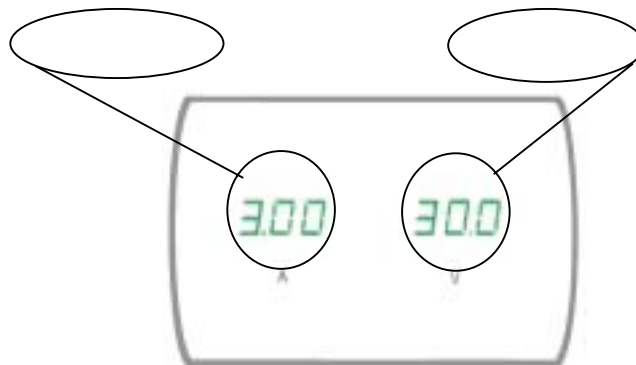

(DC OUTPUT OFF)

(DC OUTPUT ON)

30.0V
3.00A

30.0V
3.00A

6.

6-1

40°C

가

6-2

10%



230V

6-3.

- 1)
- 2) : 2,000m
- 3) : 45% ~ 85%
- 4) : Category (Overvoltage category)
- 5) : Degree2



본 사용설명서는 사전 예고 없이 변경될 수 있습니다.